


$\frac{1}{2}$ " [12.7mm] MAX RELIEF

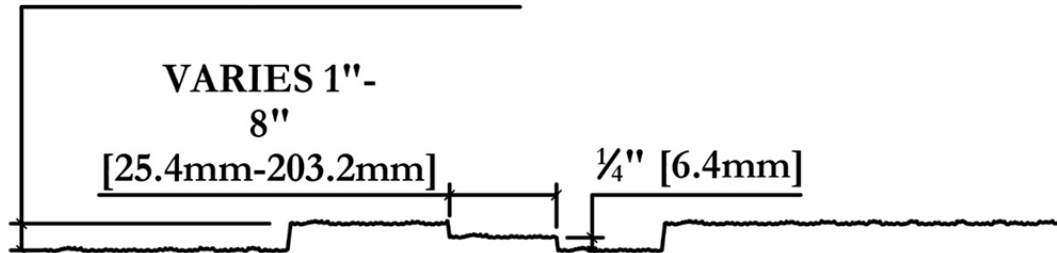

## #711 Cambridge

Architectural concrete surface treatment shall be obtained with Architectural Polymers® elastomeric form liner as manufactured by Architectural Polymers®. Release agent shall be approved and applied as per Architectural Polymers® recommendation. Factory bonded  $\frac{3}{4}$ " plywood is also available. No substitutions will be allowed without prior written approval from the architect or engineer.

### #711 Cambridge Short Form Specification

©2018 Architectural Polymers Inc ® All rights reserved.

