

'his material is the confidential and proprietary property of Architectural Polymers, Inc. ("AP") that you are only permitted to use under license in connection with your business dealings with AP. Unless you and AP agree otherwise in writing, AP grants you a limited license to use these documents/plans, but you may not copy, modify, distribute. or transmit or disclose this material to others without AP's written consent. Copyright 2017 Architectural Polymers, Inc



Approval Signature Required

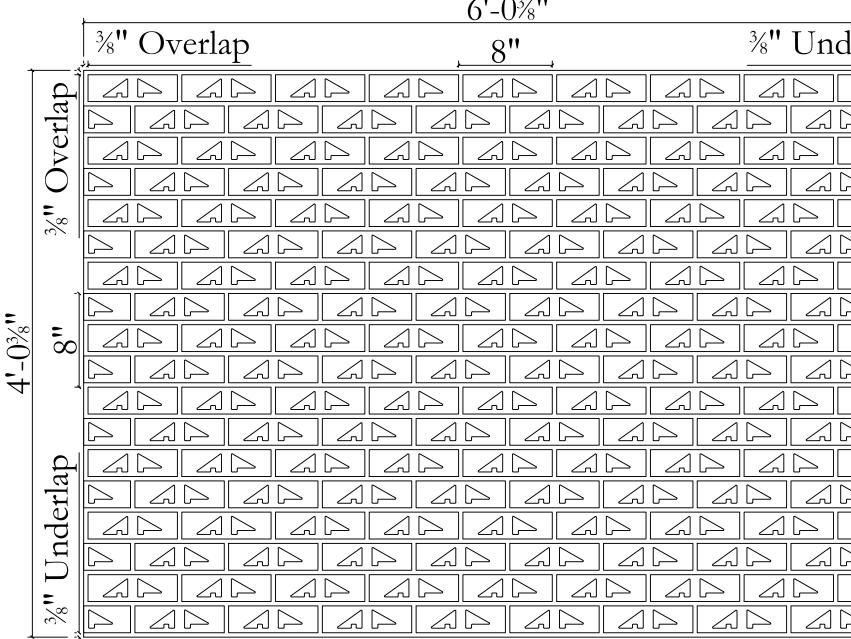

**Typical Cove Joint Profile** 



ustome

Plastic formliners MUST be stored at a temperature range of 55° to 85° Fahrenheit. Failure to do so will result in permanent distortion to these plastic formliners and will warrant them both unusable and destroyed. Therefore, AP Thermoforming will NOT assume any liability for damaged formliners caused from improper storage



1035 Little Gap Highway Palmerton PA, 18071 610-826-4579 Fax: 610-826-4614

automer.		
ob Name:		
ïtle:		
	#602-S Modular 1/2 Running Bond	

lerlap		
$\square$	$\square$	
$\leq$		
$\square$	$\square$	
$\leq$		
$\square$	$\square$	
$\leq$		
$\square$	$\square$	
$\geq$		
$\square$	$\triangleright$	
$\geq$		
$\square$	$\triangleright$	
$\leq$		
$\square$	$\triangleright$	
$\leq$		
$\square$	$\left \right>$	
$\leq$		
$\square$	$\triangleright$	
$\leq$		

ITEM # 3	04584
Drawn By:	Date:
Approved By:	Date:
Scale: None	Tolerance: $\pm 1/16$
Page: 1	Drawing Number:

	This material is the confidential and proprietary property of Architectural Polymers, Inc. ("AP") that you are only permitted to use under license in connection	
Formliner may require backing provided by customer	with your business dealings with AP. Unless you and AP agree otherwise in writing, AP grants you a limited license to use these documents/plans, but you	Approval Signature Req
· · · · · · · · · · · · · · · · · · ·	may not copy, modify, distribute. or transmit or disclose this material to others without AP's written consent. Copyright 2017 Architectural Polymers, Inc.	rippioval signature Req

12'-0%"

	12-0/8	
ŕ		
-		
-03%		
$\infty$		
4		

Plastic formliners MUST be stored at a temperature range of 55° to 85° Fahrenheit. Failure to do so will result in permanent distortion to these plastic formliners and will warrant them both unusable and destroyed. Therefore, AP Thermoforming will NOT assume any liability for damaged formliners caused from improper storage



1035 Little Gap Highway Palmerton PA, 18071 610-826-4579 Fax: 610-826-4614

)	Name:

Iob

Title:

Customer:

#602-S Modular 1/2 Running Bond Assembled

## quired

## ITEM # 304584

Drawn By:	Date:
,	
Approved By:	Date:
Approved by.	Date.
Scale: None	Tolerance: $\pm 1/16$
	•
Page:	Drawing Number:
Z	