
Formliner may require backing provided by customer	This material is the confidential and proprietary property of Architectural Polymers, Inc. ("AP") that you are only permitted to use under license in connection with your business dealings with AP. Unless you and AP agree otherwise in writing, AP grants you a limited license to use these documents/plans, but you may not copy, modify, distribute. or transmit or disclose this material to others without AP's written consent. Copyright 2017 Architectural Polymers, Inc.	Approval Signature Req	
	12'-0"		




Plastic formliners MUST be stored at a temperature range of 55° to 85° Fahrenheit. Failure to do so will result in permanent distortion to these plastic formliners and will warrant them both unusable and destroyed. Therefore, AP Thermoforming will NOT assume any liability for damaged formliners caused from improper storage

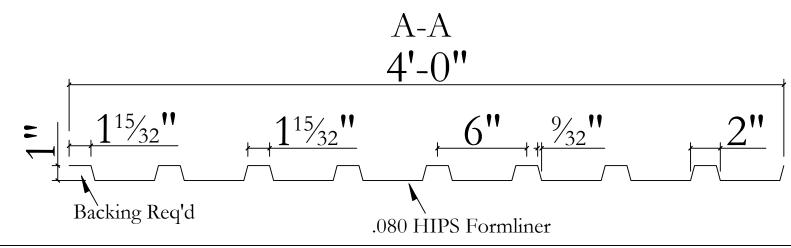

1035 Little Gap Highway Palmerton PA, 18071 610-826-4579 Fax: 610-826-4614

ermanent distortion to these plastic formliners and amaged formliners caused from improper storage	ITEM #	309865
ustomer:	Drawn By:	Date:
ob Name:	Scale: None	Tolerance: $\pm 3/16$
itle:	Page: 1	Drawing Number:
#332 2" Rib 6" OC		



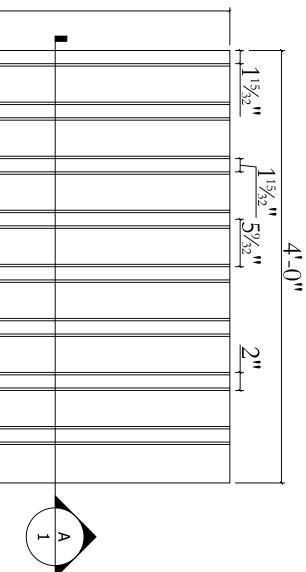

Formliner n	nay require backing provided by customer	This material is the confidential and proprietary property of Architectural Polymers, with your business dealings with AP. Unless you and AP agree otherwise in writing.	Inc. ("AP") that you are only permitted to use under license in connection AP arants you a limited license to use these documents/alans, but you	And more 1 Signations Described	
	lay require backing provided by eastoned	with your business dealings with AP. Unless you and AP agree otherwise in writing, may not copy, modify, distribute. or transmit or disclose this material to others with		Approval Signature Required	
ĺ			24'-0"		
Pattern not designed to stack in 12' direction. A noticeable seam will occur if stacking the liners in 12' direction					
А					
h notic					
ę					noticeable
able se					
am w					
will o					
ccur					occur
if no					12'- if nc
ot pro					
properly					12'-0" if not properly
s					
ealed be					realed be
∢ ⊅efore					▲ vefore
e pou					e pot
pouring					pouring
				1 and 1	
	lactic formlinors MUST ha stared at a tome aretur		noticeable seam will occur if stacking the liners in 12'		
P V	vill warrant them both unusable and destroyed.	re range of 55° to 85° Fahrenheit. Failure to do so will resu Therefore, AP Thermoforming will NOT assume any liability	y for damaged formliners caused from improper si	torage ITEM #	309865
			Customer:		Date:
		1035 Little Gap Highway	Job Name:	Scale: NI a pa	Tolerance: $\pm 3/16$
		Palmerton PA, 18071	poo maine.	Page: 2	Drawing Number:
		610-826-4579 Fax: 610-826-4614	Title: #222 2" P.b. (" OC	2	



Fax: 610-826-4614

#332 2" Rib 6" OC Assembled