Formliner may require backing provided by customer
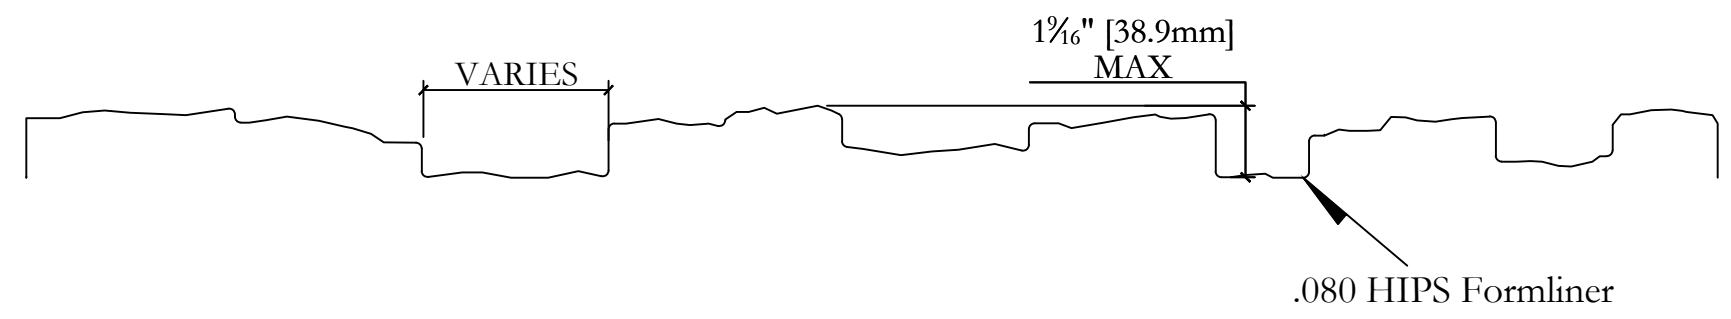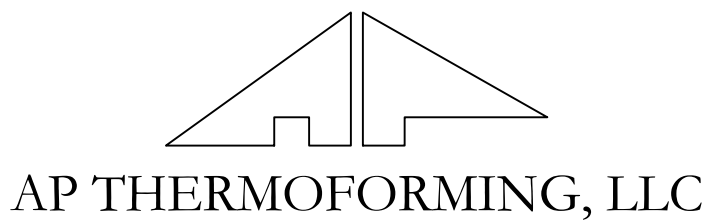
Approval Signature Required_____

12'-0"

4'-0"

Hatch for visual reference only actual stone layout determined by AP

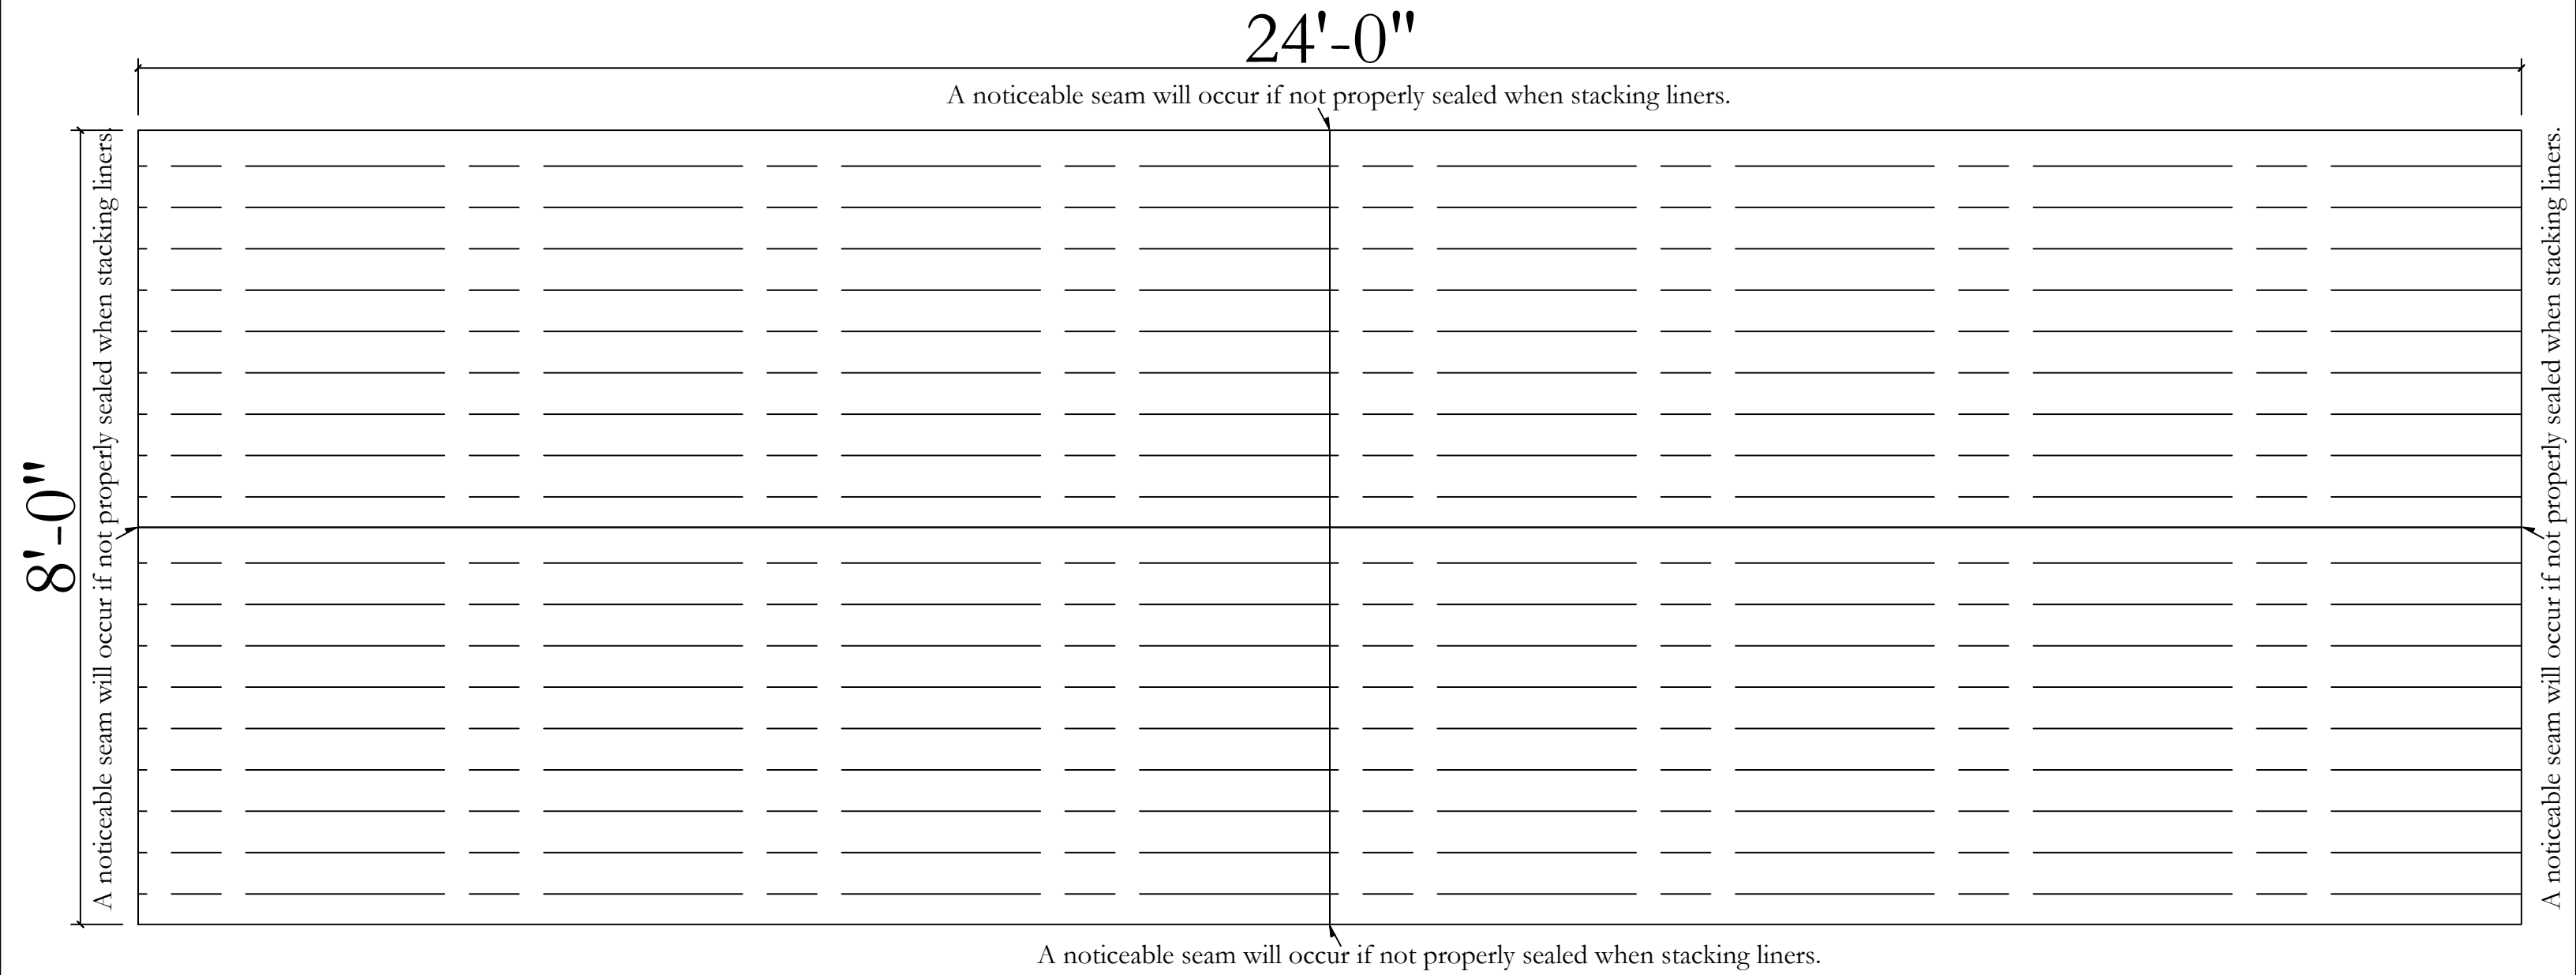Formliner may require backup provided by customer

Typical Section

1⁹⁄₁₆" [38.9mm]
MAX

VARIES

.080 HIPS Formliner

ITEM # 308356

AP THERMOFORMING, LLC

1035 Little Gap Highway
Palmerton PA, 18071
610-826-4579
Fax: 610-826-4614

Customer:

Job Name:

Title:
#933 Ledgestone Drystack

Drawn By: Date:

Approved By: Date:

Scale:
None

Tolerance:
±3/16

Page:
1

Drawing Number:

Approval Signature Required_____

24'-0"

A noticeable seam will occur if not properly sealed when stacking liners.

8'-0"

A noticeable seam will occur if not properly sealed when stacking liners.

A noticeable seam will occur if not properly sealed when stacking liners.

A noticeable seam will occur if not properly sealed when stacking liners.

A noticeable seam will occur if not properly sealed when stacking liners.

Plastic formliners MUST be stored at a temperature range of 55° to 85° Fahrenheit. Failure to do so will result in permanent distortion to these plastic formliners and will warrant them both unusable and destroyed. Therefore, AP Thermoforming will NOT assume any liability for damaged formliners caused from improper storage
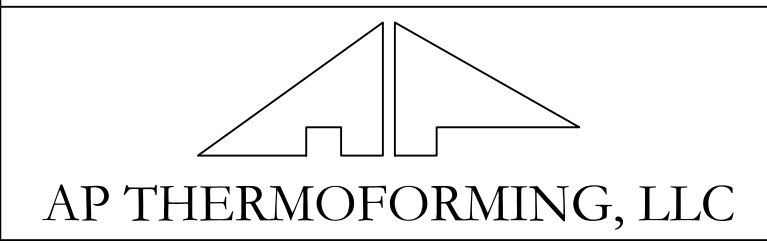
ITEM #   308356

AP THERMOFORMING, LLC

1035 Little Gap Highway
Palmerton PA, 18071
610-826-4579
Fax: 610-826-4614

Customer:		Drawn By:	Date:
Job Name:		Approved By:	Date:
Scale: None		Tolerance: ±3/16	
Title: # Ledgestone Drystack Assembled		Page: 2	Drawing Number: